


STANDARD TOLERANCE ASSEMBLY (ISO 286-1:1988)	
DIMENSION RANGE	IT 12
0-3	±0.05
3-6	±0.06
6-10	±0.08
10-18	±0.09
18-30	±0.11
30-50	±0.13
50-80	±0.15
80-120	±0.18
120-180	±0.20
180-250	±0.23
250-315	±0.26
315-400	±0.29
400-500	±0.32
500-630	±0.35
630-800	±0.40
800-1000	±0.45

REV	CHANGE DESCRIPTION	ZONE	EC #	DATE	APV BY
A	PRELIMINARY				
COMPUTERIZED DOCUMENT NO MANUAL REVISIONS PERMITTED					

RELEASE FOR TOOLING

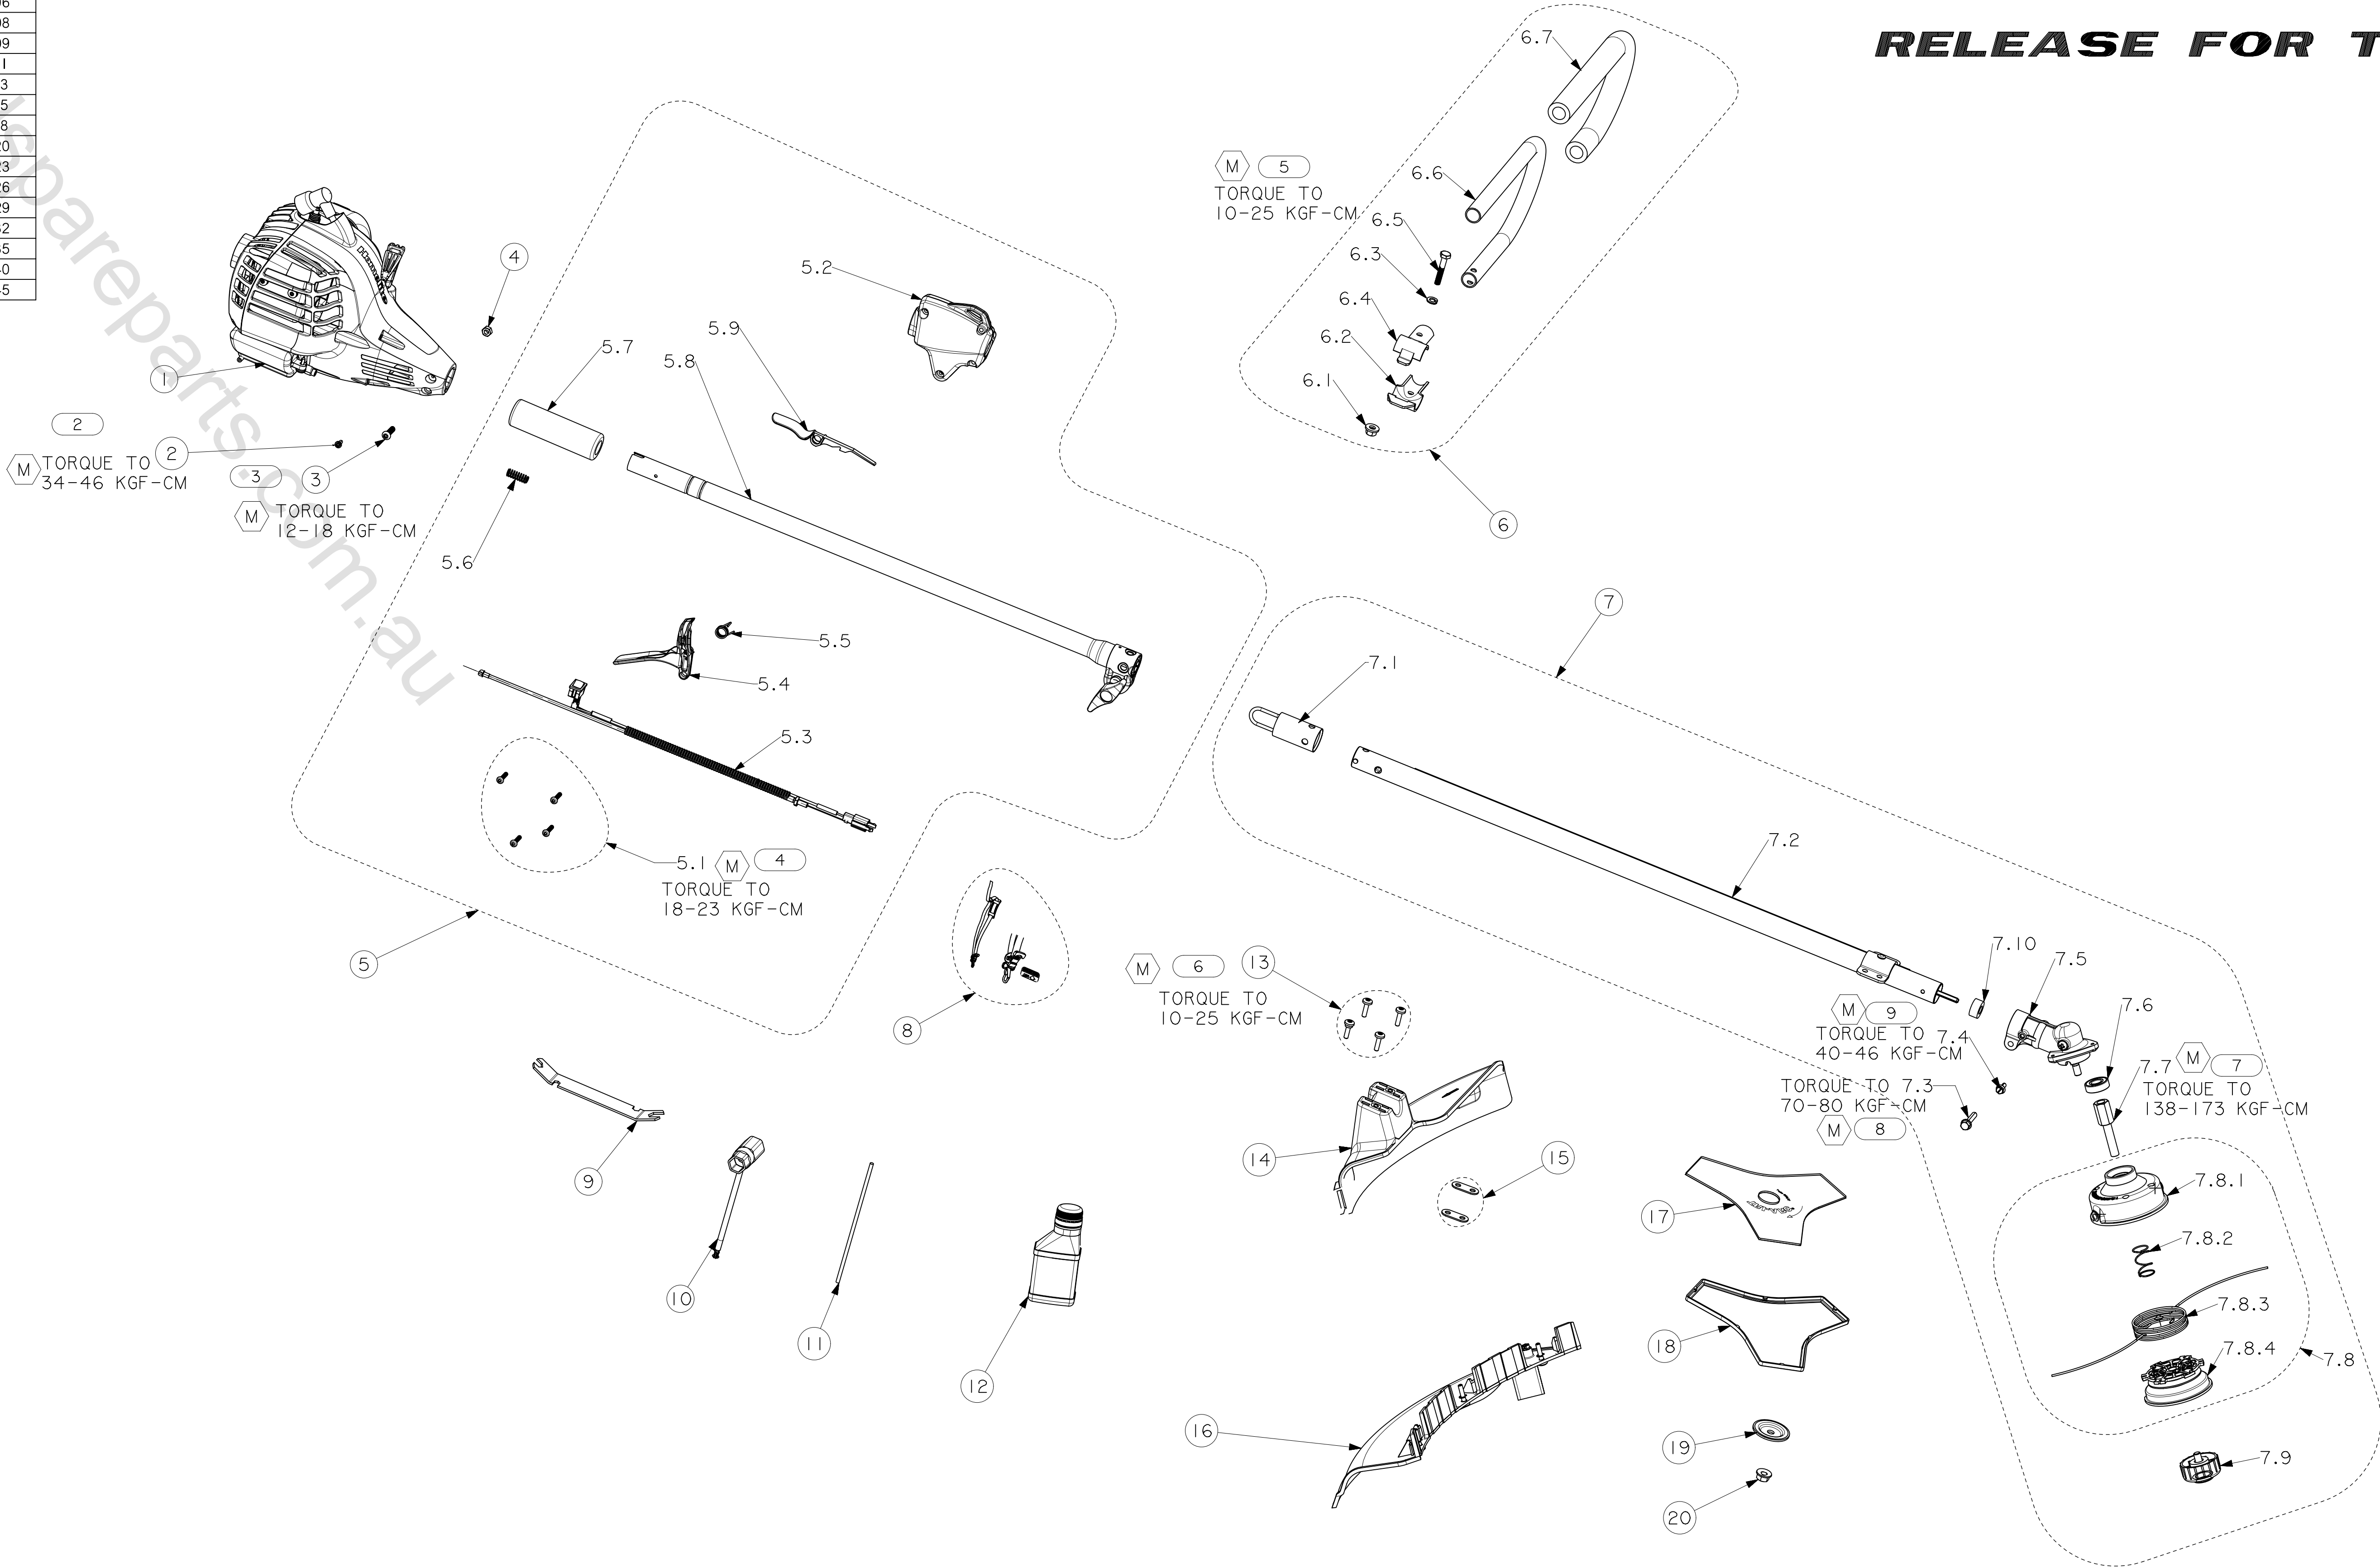

RELEASE FOR TOOLING

NOTES: 1

- REFER TO COMPONENT DRAWING FOR INSPECTION CRITERIA
- SEE QUALITY ASSURANCE FOR ADDRESSING CRITICAL AND MAJOR DIMENSIONS

TOTAL C THIS PAGE = 0

TOTAL M THIS PAGE = 8

 CONFIDENTIAL THIS DRAWING IN DESIGN AND DETAIL IS THE PROPERTY OF TECHTRONIC INDUSTRIES COMPANY LIMITED. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.	CN GRA PIN: 090343005		METRIC UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		3RD ANGLE PROJECTION
	SC SAP PIN:		PART NAME:		
	DWN BY: ZCB		APV BY:		
	COLOR:		BU OP		APV DATE:
DIMENSIONS/TOLERANCE PER ASME Y14.5 - 2009		UNSPECIFIED DIMENSIONS REFERENCE CAD MODEL		WEIGHT:	
PART&PROCESS MUST COMPLY WITH THE COMPANY REQUIREMENTS OF HAZARDOUS SUBSTANCE FREE.		SCALE: 1:1		SHEET 2 OF 2	
SIZE: PLM ID: 09034300500099		REV: A		090343002	
26CC RYOBI SIMPLE START CURVE SPLIT S					