

900861606

SUB

TOLERANCE FOR METAL	TOLERANCE
DIMENSION	1 1/2 IN & 7
10-30	+0.01
30-50	+0.01
50-80	+0.01
80-120	+0.02
120-180	+0.03
180-250	+0.04
250-315	+0.05
315-400	+0.06
400-500	+0.07
500-630	+0.08
630-800	+0.10
800-1000	+0.12

REV ZONE

DESCRIPTION

DESIGN RELEASED

LCX/MA 02/27/09

EGR


CHECKED

NO. 03/19/09

COMPUTERIZED DOCUMENT

NO MANUAL REVISIONS PERMITTED

Homelite
Uncontrolled copy
for reference only
(GLC/L)

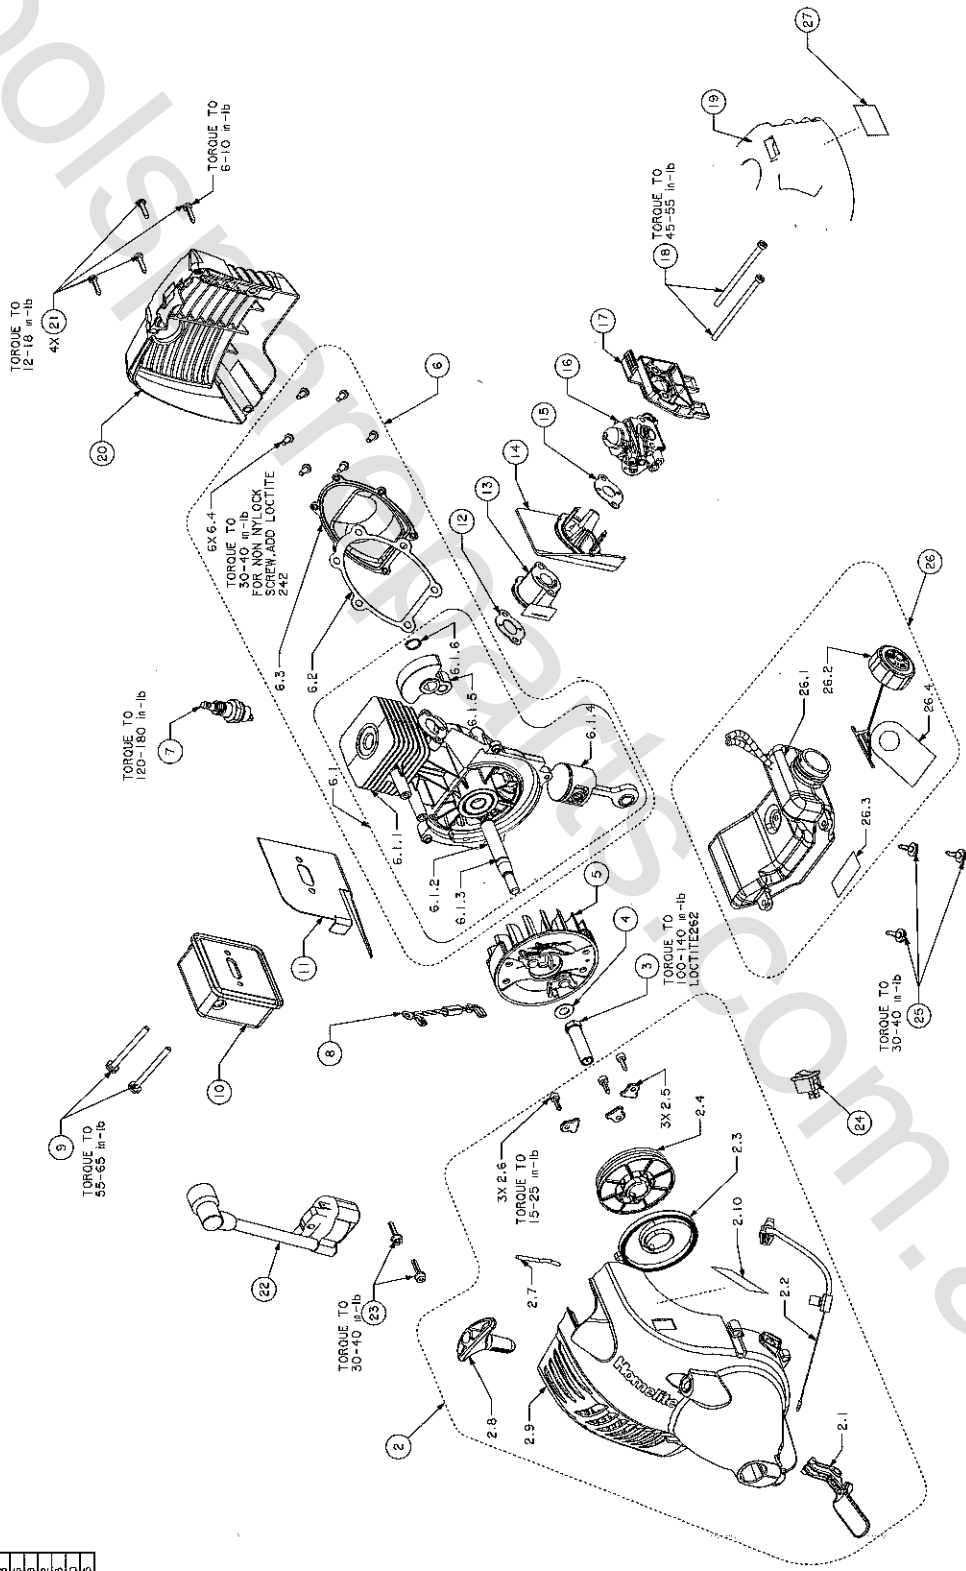

- NOTES:
1. AIR GAP SETTING OF .008/.012" TO BE MADE WITH SHIM BETWEEN FLYWHEEL, MAGNETS AND IGNITION FOR 360° ROTATION.
 2. PUSH FUEL LINES TO STOP OVER CARBURETOR, 2 PLACES, USING P-80.
 3. INSTALL SPRING CONTAINER, ITEM 33, AND STARTER PULLEY, ITEM 32, WITH SPRING LOOP OVER POST IN STARTER HOUSING, ITEM 37. REWIND STARTER PULLEY 2-2.5 TURNS. INSTALL RETAINER TABS, ITEM 31.
 4. LUBRICATE STARTER POST WITH LIGHT COAT OF GREASE BEFORE INSTALLING STARTER PULLEY.
 5. SEE QUALITY ASSURANCE FOR ADDRESSING CRITICAL AND MAJOR INSPECTIONS

TOTAL DIMENSIONS ON THIS PAGE = 0
TOTAL DIMENSIONS ON THIS PAGE = 0

REV	ZONE	DESCRIPTION	DATE	BY	CHKD	AS PURCHASED	REMARKS
01		DESIGN RELEASED	LCX/MA 02/27/09				
02		COMPUTERIZED DOCUMENT	NO. 03/19/09				
03		NO MANUAL REVISIONS PERMITTED					
04							
05							
06							
07							
08							
09							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							