
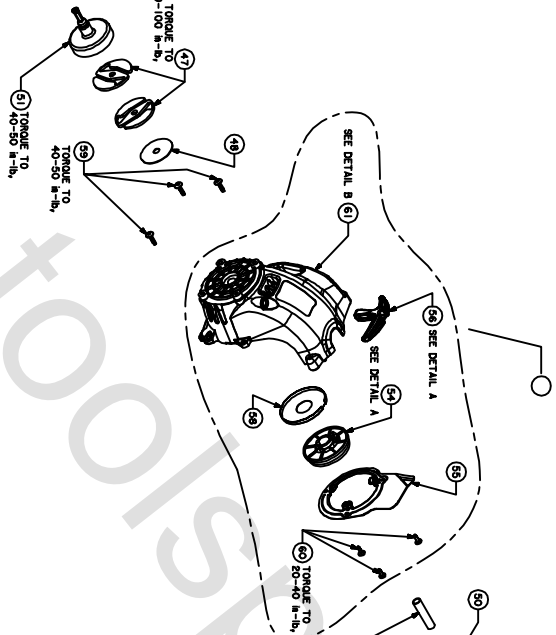
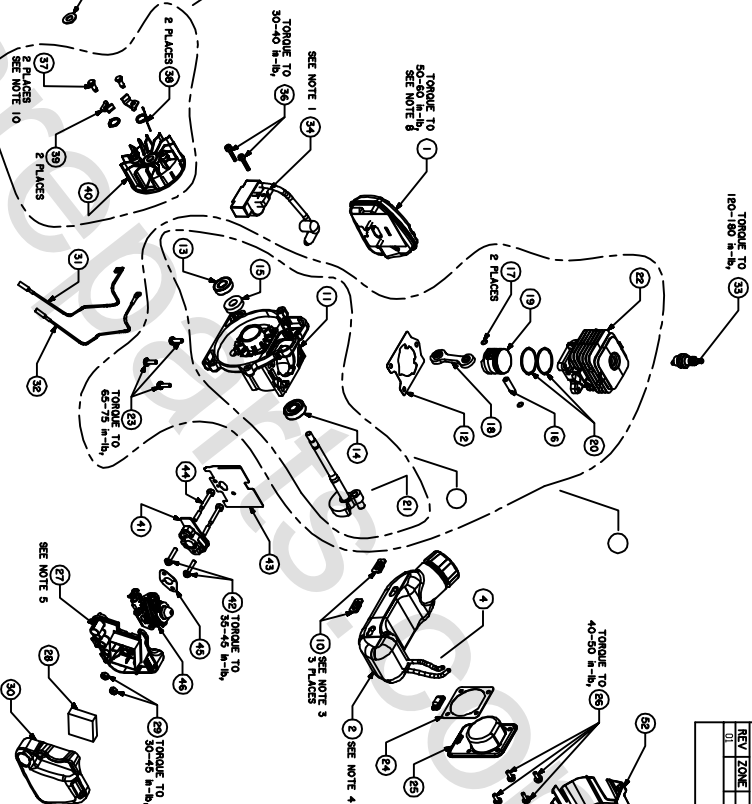


REVISIONS
DESCRIPTION
RELEASE
COMPUTERIZED DOCUMENT NO MANUAL REVISIONS PERMITTED



1. AIR, AIR SETTING OF "ROCK" 012 IS TO BE MADE WITH SHED BETWEEN FLYWHEEL MARKETS AND NOT ON TOP OF EITHER OF THEM.
2. ALL WIRE MUST NOT BE PINCHED, BROKE OR HAVE ANY OTHER NOTATION.
3. RUBBER BANDS, ITEM 10, TO BE TAPPED AT ASSEMBLY BY FEATURES ON THE CONDUIT.
4. ITEM 11, CHANGES OVER, ITEM 23, AND CORRESPONDING FEATURES ON THE FIELD PAIR, ITEM 25.
5. ROUTE FEED LINE TO THAT IT IS CLOSER TO THE CHANGES WITH THE RETURN LINE.
6. THE FEED IN ONE ITEM 16, AS SHOWN, TAKE LONG END INTO RECESS OF STARTER PALLETS, ITEM 54.
7. INSTALL SPRING CONTAINER, ITEM 28, AND TIGHTEN PALLETS, ITEM 54, WITH SPRING LOCK OVER POST WITH 3 SPRINGS, ITEM 30.
8. FOR IDENTIFICATION PURPOSES, THE SUFFICIENT, ITEM 1, FOR ONCE AND PHOENIX IS TO HAVE THE MULTIPLE PART.
9. LUBRICATE STARTER POST WITH LIGHT COAT OF GREASE, ITEM 57, BEFORE INSTALLING STARTER PALLETS, ITEM 54.
10. THE CLEARANCE BETWEEN THE PIN, ITEM 37, AND THE PALLETS, ITEM 59, MUST BE WITHIN A MAX. OF MOVING FREELY AND A MAX. OF .003 (.0003").

000198177	300c CLUTCHED POWER HEAD	AS ASSEMBLED
000198177	REARMS	
LESS OUTFITTERS SPECIFIED ON DRAWING DRAWING NO. 300C-01000 REV. 1 DATE 10/11/05 BY 000198177 DESIGNED BY DATE CHECKED BY DATE APPROVED BY DATE NATIONAL DESCRIPTION N/A DRAWING NO. 300C-01000 REV. 1 DATE 10/11/05 BY 000198177	300c CLUTCHED POWER HEAD	AS ASSEMBLED
000198177	REARMS	
LESS OUTFITTERS SPECIFIED ON DRAWING DRAWING NO. 300C-01000 REV. 1 DATE 10/11/05 BY 000198177 DESIGNED BY DATE CHECKED BY DATE APPROVED BY DATE NATIONAL DESCRIPTION N/A DRAWING NO. 300C-01000 REV. 1 DATE 10/11/05 BY 000198177	300c CLUTCHED POWER HEAD	AS ASSEMBLED
000198177	REARMS	